


# Linear Diaphragm Pumps

## LP-80

- Special artificial rubber to keep a steady air output and pressure.
- Advanced air-compressing system, damping system and multi-level muffler which is extremely low in noise.
- The structure is reasonable and compact, it is long service life and acquiring best effect with lowest energy consumption.
- Aluminum alloy case, quick in heat-dissipation and easy to move.




### Airflow Curve

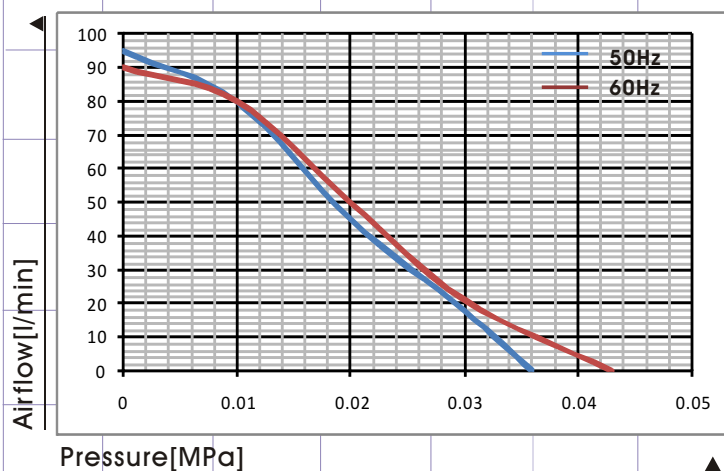


### Specification

|                     |                     |
|---------------------|---------------------|
| Model               | LP-80               |
| Outlet Airflow      | 80l/min             |
| Rated Voltage       | AC220/100V          |
| Frequency           | 50/60Hz             |
| Input power         | 60W                 |
| Maximum Pressure    | 0.036KPa            |
| Sound Level         | 40dB                |
| Weight              | 7Kg                 |
| Dimensions          | 210×185×171mm       |
| Ambient Temperature | 5 deg.c to 55 deg.c |


### Application Examples

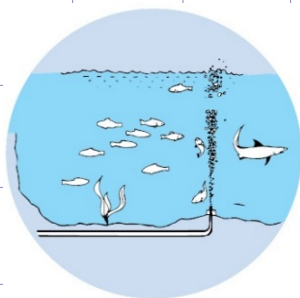


Aquarium Aeration

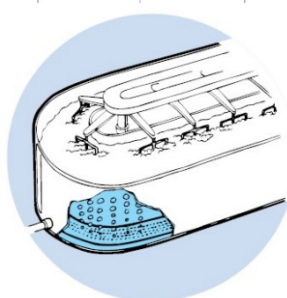

Liquid Mixer Bubbling

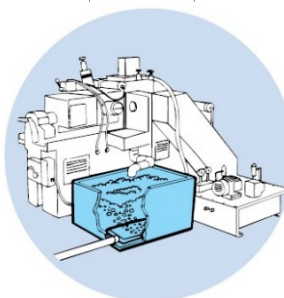

Air Purification

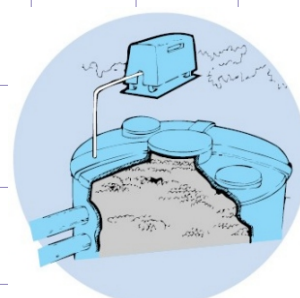

Sewage Treatment Aeration

Dimensions mm