


DP40V

- Oil-less, non-lube piston and cylinder
- Durable Valves
- Balanced for smooth, low vibration operation long-life
- Permanently lubricated motor shaft and connecting rod bearings
- Low sound levels
- Field service capability










Airflow Curve

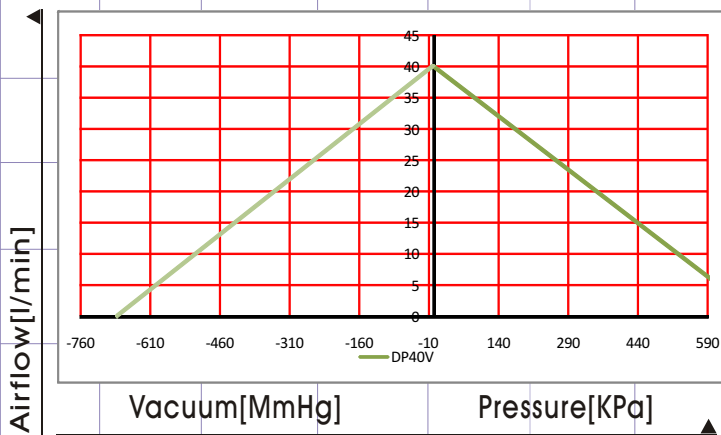

Specification

Model	DP40V
Outlet Airflow	35l/min
Rated Voltage	AC220/100V
Frequency	50/60Hz
Input power	180W
Maximum Pressure	300KPa
Maximum Vacuum	-90KPa
Sound Level	57dB
Weight	4.5Kg
Dimensions	168×103×164mm
Ambient Temperature	0 deg.c to 45 deg.c

Application Examples



Dimensions mm

