



## EW180

- Oil-less, non-lube piston and cylinder
- Durable Valves
- Balanced for smooth, low vibration operation long-life
- Permanently lubricated motor shaft and connecting rod bearings
- Low sound levels
- Field service capability

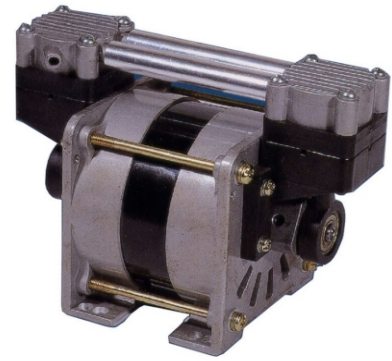









### Airflow Curve

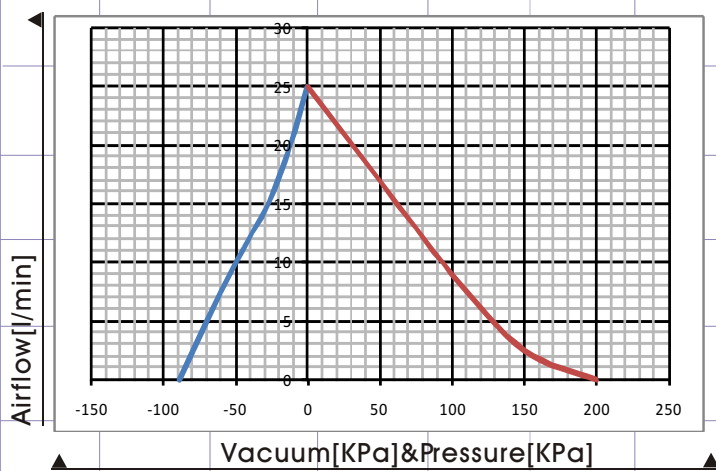

### Specification

Model	Ew180
Outlet Airflow	20l/min
Rated Voltage	AC220/100V
Frequency	50/60Hz
Input power	95W
Maximum Pressure	200KPa
Maximum Vacuum	-85KPa
Sound Level	52dB
Weight	2.1Kg
Dimensions	162×90×123mm
Ambient Temperature	0 deg.c to 45 deg.c

### Application Examples



### Dimensions mm

